

Axis Guardian Portal Settings

01/10/2024 12:36 pm EST


Overview

This is a brief look at the basic settings that would be needed for configuring AVHS to work with Manitou. This is not an exhaustive look at configuring the Axis system.

External SiteID

To set the External SiteID you have to go to the Advanced Settings page.

- Log into the Axis Portal as the user
- Select the ellipsis in the top right corner
- Select Go to advanced settings

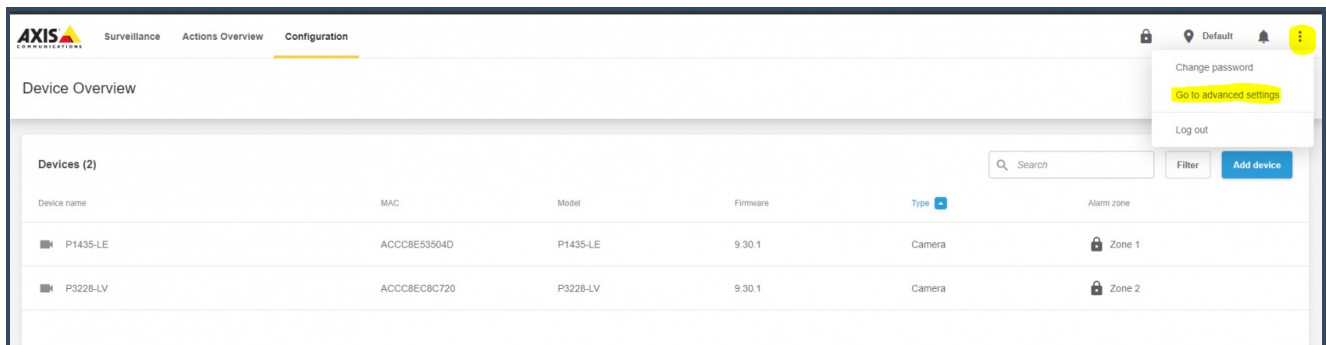

- Select Manage sites and alarm zones



[Surveillance](#) [Configuration](#) [Settings](#)

Account

[Manage account](#)

[Manage sites and alarm zones](#)

[Change password](#)

[Add new device](#)

[Add new guest](#)

[History](#)

Messages

[Notifications](#)

Devices

Device name	Connected	Storage	MAC
P1435-LE	✓	⊘	ACCC8E53504D
P3228-LV	✓	⊘	ACCC8EC8C720

Guests

Show entries

Full name

Username

No data

Showing 0 to 0 of 0 entries

- Select the site you wish to configure and click the edit pencil (Typically Default)

AXIS COMMUNICATIONS

Toby Prescott
Site: Logout

[Surveillance](#) [Configuration](#) [Settings](#)

Settings / Manage sites and alarm zones

Sites

Create site

Name:

External ID:

Create alarm zone


Site:

Name:

Site name	External id	Number of devices	Disconnected	
Unassigned devices		0	0	
Default	51789a	2	0	
Zone 1		1	0	
Zone 2		1	0	

© Axis Communications, All Rights Reserved.

- Change the External id to be the same as the account TXID in Manitou

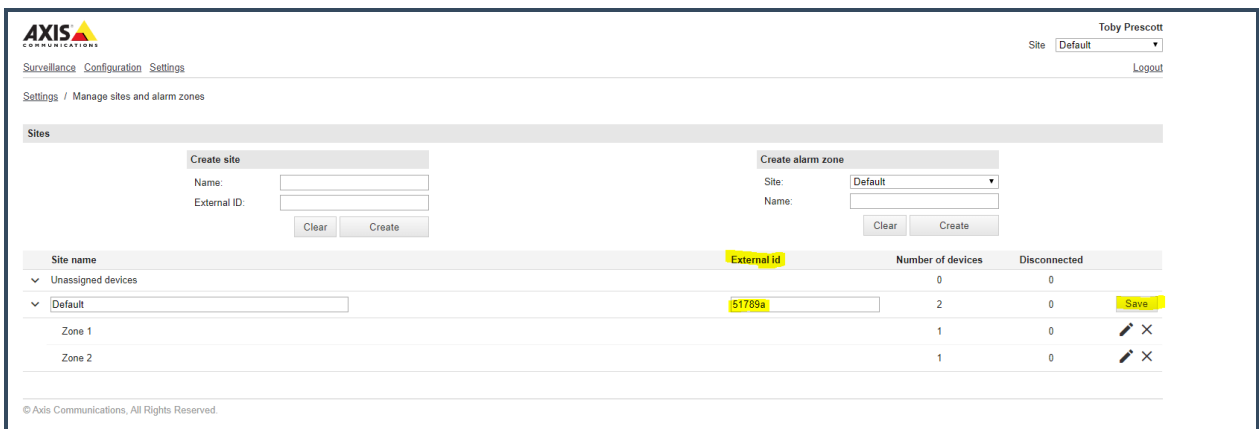


- Click the Save button


External DeviceID

The way that we have built the Data Map in Media Gateway uses the external device ID set in Axis as the zone. This MUST be set in the Axis portal.

- Log into the Axis Portal as the user
- Select Configuration tab
- Click on each device to configure it

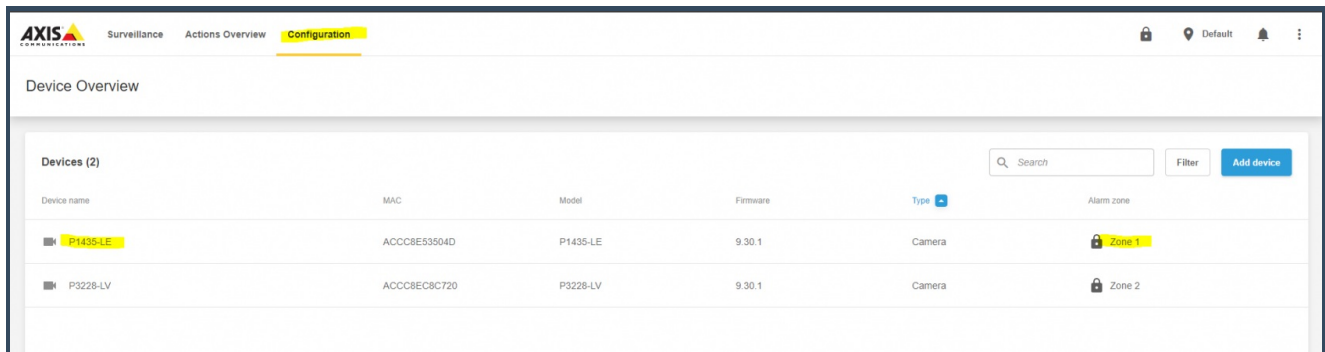

- Set the External ID to match the Alarm Zone number

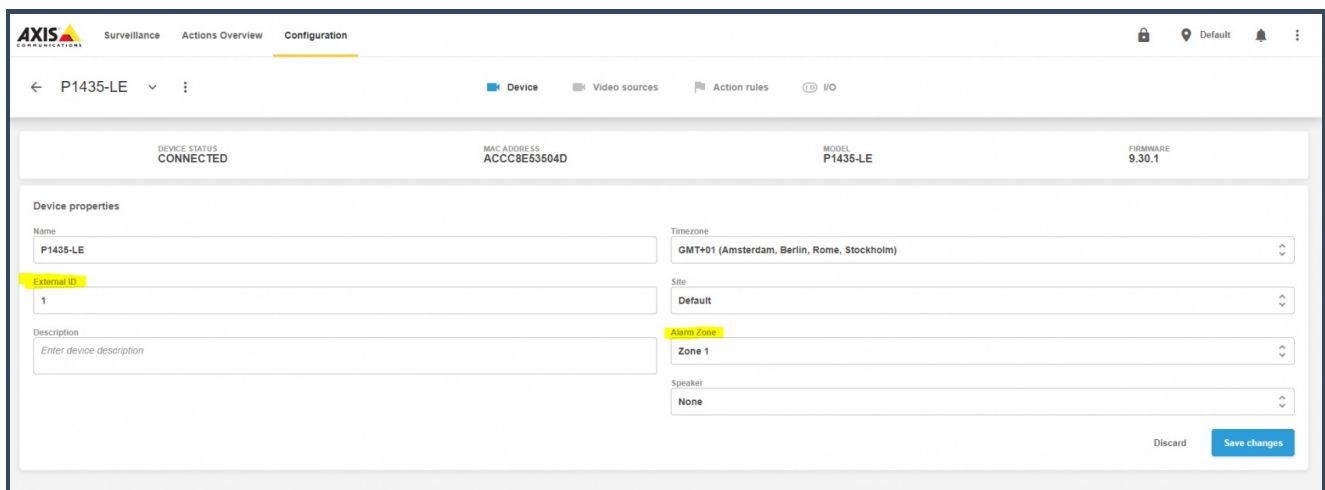

If you don't have defined alarm zones, this is done in the Advanced Settings section of the Axis Portal. Setting up an using alarm zones in Axis is beyond the scope of this document. Please work with Axis directly on these.

Setting the URL

At this time, Bold does not have access to the section of the portal to configure the URL. The customer will need to work with Axis to set this up. They should just provide Axis with the URL the created when setting up the WebHookPost application. It would look similar to this:

```
1 https://{default web site}/{alias}/avhs
```